

Quick and Easy Installation Instructions



Figure 1



Figure 2

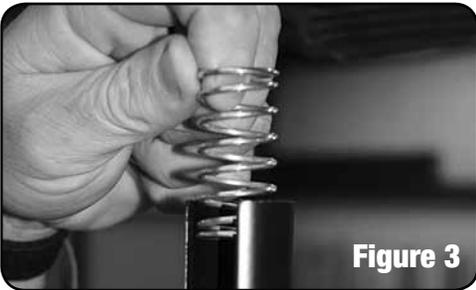


Figure 3

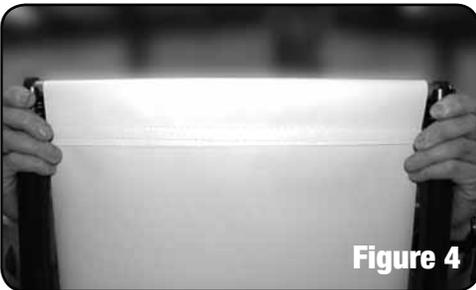


Figure 4




Figure 5




Figure 6

1. See parts list on other side. Skip to Step 4 if your stand has already been installed or if you are replacing the existing banner. Tools needed to install stand and base: 3/16" drill bit, marking pencil or pen, flat-head screw driver and a 5/16" socket and ratchet.
2. Place base (A) in place where stand is to be installed and mark the four holes in the stand for drilling. See Figure 1.
3. Drill marked holes 1 1/2" deep with a 3/16" masonry bit. Align base (A) on the four holes and secure base to concrete with the four 1/4" concrete anchors (B) using a 5/8" socket and ratchet. Hand tighten. See Figure 2.
4. Place the left and right vertical poles (C and D) in the base and secure to the base with nut (E) and bolt (F) using a screwdriver and hand tighten. Make sure the left pole (C) and right pole (D) are in the correct positions. See Figure 2.
5. Secure nut (G) and bolt (H) in the tops of poles (C and D) using a screwdriver and hand tighten. Insert the two coil springs (I) in the tops of the poles. See Figure 3.
6. Take the banner (15.5" x 59.75" in size) and insert top cross pole (J) with rubber ends in the top pole pocket of the banner and insert in the top of poles (C and D). See Figure 4.
7. Insert bottom cross pole (K) into the bottom pole pocket of the banner. Pull down on the banner while inserting one end into vertical pole (C or D) and latching the other end into place. Release the bottom of the banner and let the tension pull it up. Banner should be in place and taut. See Figure 5.
8. Finally, place rubber end caps (L) on the top of each of the vertical poles (E and F). See Figure 6.


Parts List

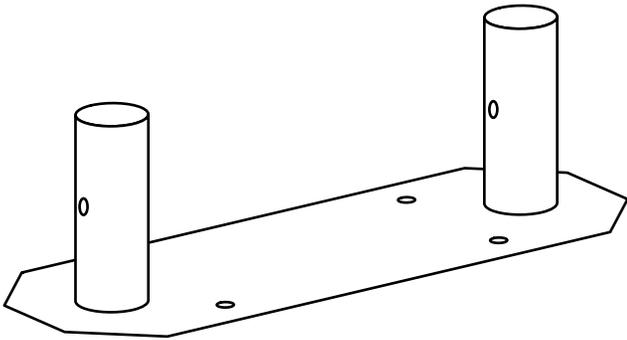


One Base (A)

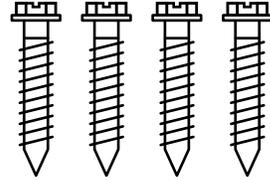


Four 1/4" x 1 1/4" Concrete Anchors (B)

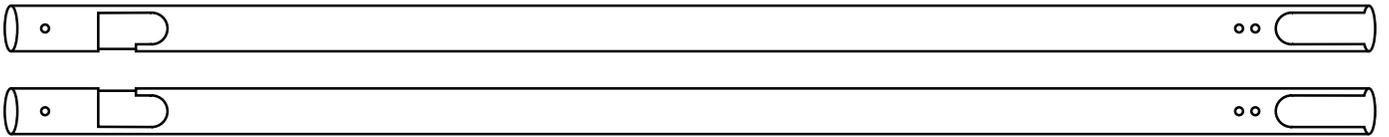

**Two Vertical Poles
Left (C) and Right (D)**

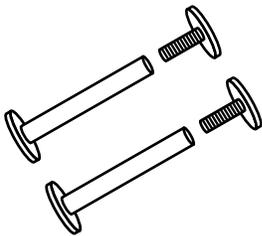


**Two 1 1/2" Bottom Fasteners
Nut (E) and Bolt (F)**




**Two 1" Top Fasteners
Nut (G) and Bolt (H)**




Two Top Springs (I)



One Top Cross Pole (J)



One Bottom Cross Pole (K)



Two Top Rubber End Caps (L)